

ENVELOPE WALL LIGHT FIXTURE

Code:

10032002.3


APLIQUE ENVELOPE 5W 3000K IP54

10032003.3

APLIQUE ENVELOPE 5W 4000K IP54



Technical data	
Installation	SALIENTE
Luminaire type	APLIQUE
Housing Finish Color / RAL	CINZA
Dimensions	200X100X30 mm
Environment	exterior
Controls	On / Off
Led	2835
Optics	opal
Optics technology	
Type of light emission	Single emission
Light emission direction	Down
Nominal Power	
Total Luminaire Power	5 W
Flux Total	
Luminaire Flux	320 lm
Voltage	230VAC
CCT	3000 - 4000K
Colour rendering index	90 Ra
C.C. / C.V.	CC
Driver	Internal
Safety class	I
IP	IP54
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Operating temperature	-20 / +50
Driver included	No
Typ. efficiency (full load)	> 90
Output LF current ripple	< 10
Overload protection / Short-circuit protection	Yes
Emergency mode	No
Cable included / length	Yes
Net weight	0.450 Kg

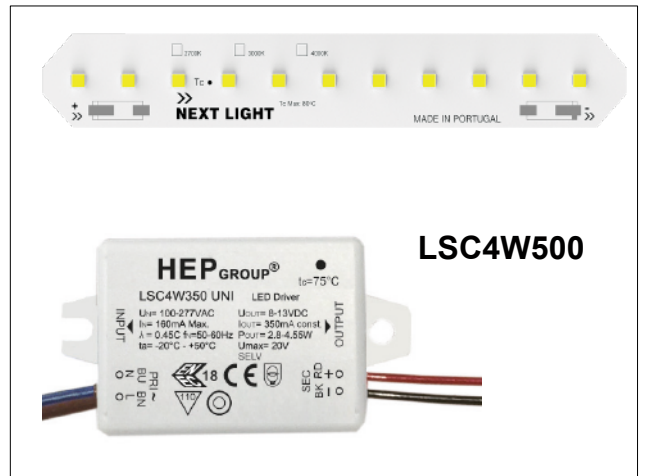

tender txt

Aplicação de parede, IP54; profundidade 30mm x 100mm Altura x 200mm comprimento. Módulo LED 2835, Ra90; Potência total de 5W, Difusor opalino, Fluxo luminoso de 320 Lm; CCT: 3000K/4000K; SDCM: 2; Risco foto biológico RG1; Corpo em alumínio, Driver integrado; 500mA; Classe isolamento: CLASS I; Controlo: On/OFF; Class F; Energy Efficiency Index (EEI) A++

MAILBOX WALL LIGHT FIXTURE

Code:

10031002.3

APLIQUE MAILBOX 5W 3000K IP54


10031003.3

APLIQUE MAILBOX 5W 4000K IP54



Technical data

Installation	
Luminaire type	AR 111
Housing Finish Color / RAL	SILVER
Dimensions	111 X 55,5 mm
Environment	Interior
Controls	On / Off
Led	COB
Optics	40° REFLECTOR
Optics technology	
Type of light emission	Single emission
Light emission direction	Down or Up
Nominal Power	
Total Luminaire Power	15,66 W
Flux Total	
Luminaire Flux	768 lm
Voltage	12V
CCT	3000 K
Colour rendering index	90 Ra
C.C. / C.V.	CV
Driver	Internal
Safety class	3
IP	IP20
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Operating temperature	-20 / +50
Driver included	No
Typ. efficiency (full load)	> 90
Output LF current ripple	< 10
Overload protection / Short-circuit protection	Yes
Emergency mode	No
Cable included / length	Yes
Net weight	0.250 Kg

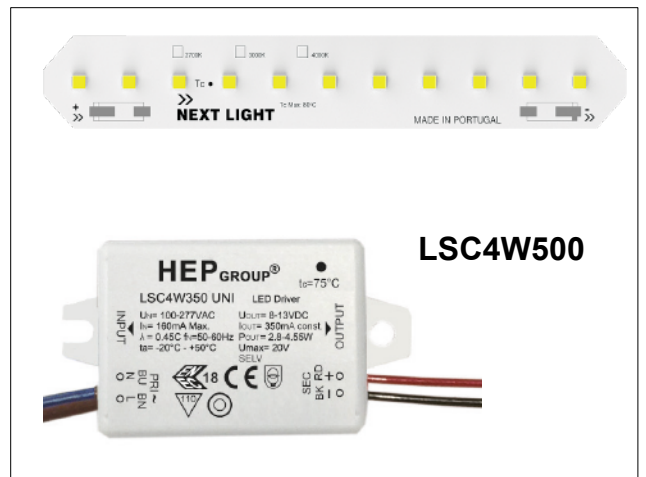

tender txt

Aplique de parede, IP54; profundidade 30mm x 150mm Altura x 150mm Comprimento. Módulo LED 2835, Ra90; Potência total de 5W, Difusor opalino, Fluxo luminoso de 320 Lm; CCT: 3000K/4000K; SDCM: 2; Risco foto biológico RG1; Corpo em alumínio, Driver integrado; 500mA; Classe isolamento: CLASS I; Controle: On/OFF; Class F; Energy Efficiency Index (EEI) A++