



TUBE S 12,5W




Technical data

Installation	Track 230VAC
Luminaire type	Spot Projector
Housing Finish Color / RAL	Black / White
Dimensions	65 x 55
Environment	Interior
Controls	On / Off / Dali
Led	COB
Optics	Lens 15°_24°_36°
Optics technology	PC
Light emission direction	↻ 90° ↻ 355°
Nominal Power	10 W
Total Luminaire Power	12,5 W
Flux Total	1,540 lm
Efficacy	117 lm/W
LOR	90%
Voltage	48VDC
CCT	2.7K / 3K / 4K
Colour rendering index	90 Ra
C.C. / C.V.	CC: 350mA
Driver	External
Safety class	⊕
IP	IP65
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Operating temperature	-20 / +50
Driver included	Yes
Typ. efficiency (full load)	> 91
Output LF current ripple	< 5
Overload protection / Short-circuit protection	Yes
Emergency mode	No
Cable included / length	Yes
Net weight	0.800 Kg
L80B10 (Tj=85°C) >60.000h	

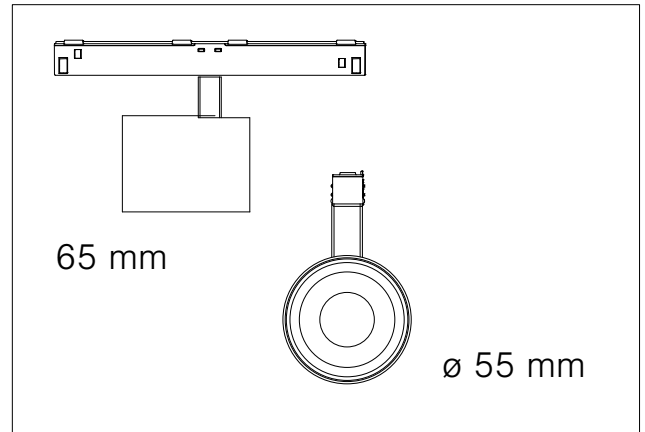


tender txt


Projector Led para calha 48VDC, corpo em alumínio injectado, pintura electrostatica poliester. Lentes em policarbonato, aberturas de 15°, 24° e 36°. Driver externo com adaptador para calha incorporado. Orientável 355° no eixo horizontal e 90° no eixo vertical. Disponível CCTs, 2700k, 3000K e 4000K. CRI > 90. Última geração de COBs, eficiência de 117 lm/W para tp = 65 °C.

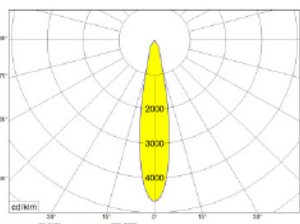


SPOT

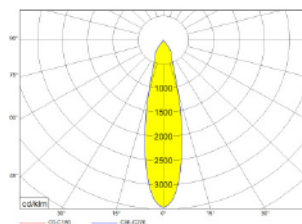

MEDIUM

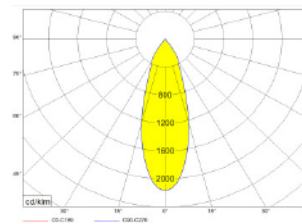

FLOOD

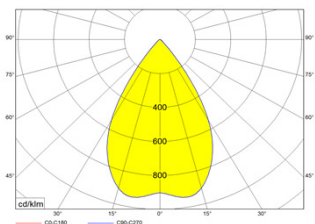

WIDE FLOOD

V2020_1

The stated luminous flux and rated electrical input power is subject to a tolerance of +/- 10%, the stated color temperature also has a tolerance of +/- 150 Kelvin. We reserve the right to make technical changes without prior notice.

07012001D.55X65	PROJECTOR TUBE M 48VDC 10W 2700K 15° BRANCO DALI
07012002D.55X65	PROJECTOR TUBE M 48VDC 10W 2700K 24° BRANCO DALI
07012003D.55X65	PROJECTOR TUBE M 48VDC 10W 2700K 36° BRANCO DALI
07012004D.55X65	PROJECTOR TUBE M 48VDC 10W 3000K 15° BRANCO DALI
07012005D.55X65	PROJECTOR TUBE M 48VDC 10W 3000K 24° BRANCO DALI
07012006D.55X65	PROJECTOR TUBE M 48VDC 10W 3000K 36° BRANCO DALI
07012007D.55X65	PROJECTOR TUBE M 48VDC 10W 4000K 15° BRANCO DALI
07012008D.55X65	PROJECTOR TUBE M 48VDC 10W 4000K 24° BRANCO DALI
07012009D.55X65	PROJECTOR TUBE M 48VDC 10W 4000K 36° BRANCO DALI
07012010.55X65	PROJECTOR TUBE M 48VDC 10W 2700K 15° BRANCO
07012011.55X65	PROJECTOR TUBE M 48VDC 10W 2700K 24° BRANCO
07012012.55X65	PROJECTOR TUBE M 48VDC 10W 2700K 36° BRANCO
07012013.55X65	PROJECTOR TUBE M 48VDC 10W 3000K 15° BRANCO
07012014.55X65	PROJECTOR TUBE M 48VDC 10W 3000K 24° BRANCO
07012015.55X65	PROJECTOR TUBE M 48VDC 10W 3000K 36° BRANCO
07012016.55X65	PROJECTOR TUBE M 48VDC 10W 4000K 15° BRANCO
07012017.55X65	PROJECTOR TUBE M 48VDC 10W 4000K 24° BRANCO
07012018.55X65	PROJECTOR TUBE M 48VDC 10W 4000K 36° BRANCO
07012019D.55X65	PROJECTOR TUBE M 48VDC 10W 2700K 15° PRETO DALI
07012020D.55X65	PROJECTOR TUBE M 48VDC 10W 2700K 24° PRETO DALI
07012021D.55X65	PROJECTOR TUBE M 48VDC 10W 2700K 36° PRETO DALI
07012022D.55X65	PROJECTOR TUBE M 48VDC 10W 3000K 15° PRETO DALI
07012023D.55X65	PROJECTOR TUBE M 48VDC 10W 3000K 24° PRETO DALI
07012024D.55X65	PROJECTOR TUBE M 48VDC 10W 3000K 36° PRETO DALI
07012025D.55X65	PROJECTOR TUBE M 48VDC 10W 4000K 15° PRETO DALI
07012026D.55X65	PROJECTOR TUBE M 48VDC 10W 4000K 24° PRETO DALI
07012027D.55X65	PROJECTOR TUBE M 48VDC 10W 4000K 36° PRETO DALI
07012028.55X65	PROJECTOR TUBE M 48VDC 10W 2700K 15° PRETO
07012029.55X65	PROJECTOR TUBE M 48VDC 10W 2700K 24° PRETO
07012030.55X65	PROJECTOR TUBE M 48VDC 10W 2700K 36° PRETO
07012031.55X65	PROJECTOR TUBE M 48VDC 10W 3000K 15° PRETO
07012032.55X65	PROJECTOR TUBE M 48VDC 10W 3000K 24° PRETO
07012033.55X65	PROJECTOR TUBE M 48VDC 10W 3000K 36° PRETO
07012034.55X65	PROJECTOR TUBE M 48VDC 10W 4000K 15° PRETO
07012035.55X65	PROJECTOR TUBE M 48VDC 10W 4000K 24° PRETO
07012036.55X65	PROJECTOR TUBE M 48VDC 10W 4000K 36° PRETO