


NXT PANEL 60X60 40W 4000K STANDART VERSION



Technical data

Installation	
Luminaire type	LGP PANEL
Housing Finish Color / RAL	WHITE
Dimensions	595 X 595 mm
Environment	Interior
Controls	On / Off
Led	2835
Optics	OPAL
Optics technology	
Type of light emission	Single emission
Light emission direction	Down
Nominal Power	
Total Luminaire Power	40 W
Flux Total	
Luminaire Flux	3994 lm
Voltage	230 VAC
CCT	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	CV
Driver	EXTERNAL
Safety class	3
IP	IP20
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Operating temperature	-20 / +50
Driver included	YES
Typ. efficiency (full load)	> 90
Output LF current ripple	< 10
Overload protection / Short-circuit protection	Yes
Emergency mode	No
Cable included / length	Yes
Net weight	0.800 Kg

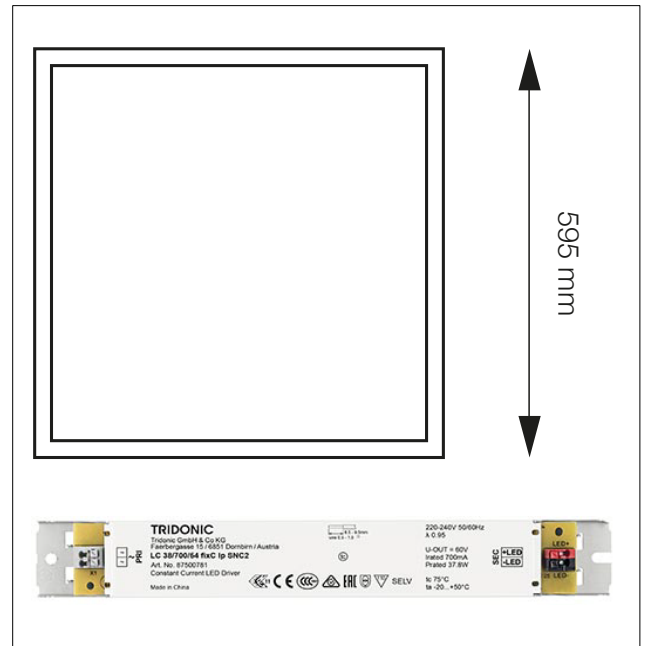

tender txt

INPUT VOLTAGE(V) 220 ~ 240 VAC

HOUSING Body in extruded aluminium, electrostatic powdered coated, RAL 9003

DIMENSION: 595 X 595 X 10 mm

OPTICS Polycarbonate plate with antistatic treatment

TECHNICAL SPECIFICATIONS

CCT: 4000K

External Driver 700 mA

Eff: 84.72 lm/W (Standart Driver)

CRI > 80 - Mac Adams 3

TOTAL FLUX(lm): 4165.7 Lm

Power Factor > 95 (Standart Driver)

Life time 40 000H

LEGAL REFERENCE: IEC 60598-2-2:2011 USED IN CONJUNCTION WITH IEC 60598-1: 2008 & EN 60598-2-2: 2012 USED IN CONJUNCTION WITH EN 60598-1: 2008 + A11 : 2009