

POLARIS 200W IP65

160lm/w



IP65

UGR <19

5 YEARS WARRANTY




Technical data

Instalation	Suspensão
Luminaire type	Campânula
Housing Finish Color / RAL	Alumínio
Dimensions	482 x 362 x 120
Environment	Interior / Exterior
Controls	Dali
Led	CREE
Optics	Lens 110°
Optics technology	PMMA Lenses
Light emission direction	Downlight
Total Luminaire Power	200 W
Flux Total	32000 lm
Efficiency	160lm/W
LOR	95%
Voltage	230VDC
CCT	4K
Colour rendering index	80 Ra
Driver	Integreted
Safety class	⊕
IP	IP65
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Operating temperature	-40 / +50
Driver included	Yes
Typ. efficiency (full load)	> 93
Output LF current ripple	< 5
Overload protection / Short-circuit protection	Yes
Emergency mode	No
UGR	< 19
WARRANTY	5 YEARS
L90B10 (Tj=85°C) >60.000h	

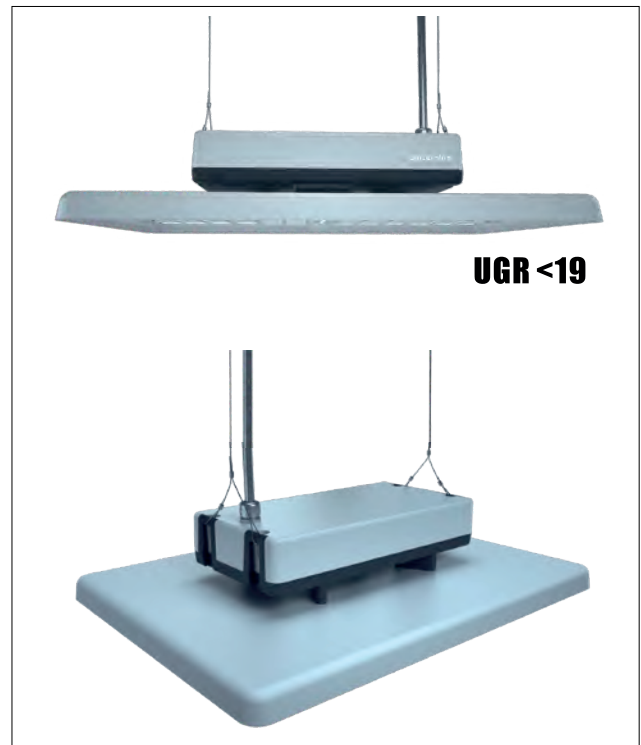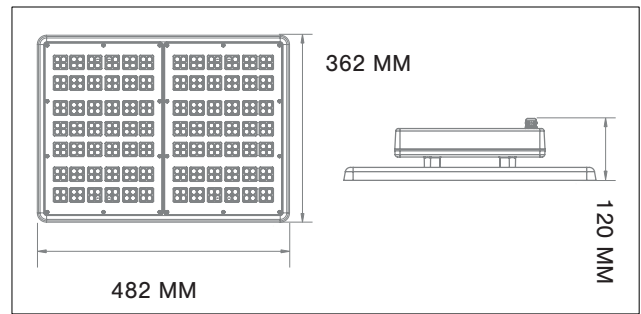

tender txt

Projector Led High-Bay, corpo em alumínio injectado, pintura electrostatica poliester. Lentes em PMMA, aberturas de 80°, 110° e 30 x 90°. 200W, 32000 Lm, 4000K, CRI > 80, IP65 - IK10, UGR<19, eficiência de 160 lm/W para tp = 65 °C. Garantia 5 anos.

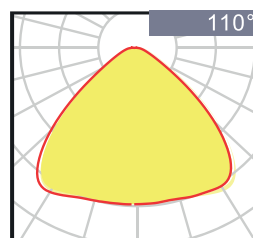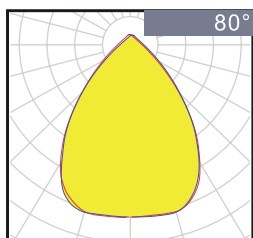

V2020_1

The stated luminous flux and rated electrical input power is subject to a tolerance of +/- 10%, the stated color temperature also has a tolerance of +/- 150 Kelvin. We reserve the right to make technical changes without prior notice.